


MADE IN ITALY



FLOODED									
Code	Voltage	Capacity	Cold Cranking	Res. Cap.	Terminal	Box	Bottom holds	Layout	Per Pallet
	V	Ah 20h	A (EN)	Minutes	Conical				
B157C	12	180	1150	380 (25A)	1 standard	B FLAT	B0	+ left	7x3=21

SAFE ENRGY TIR SHD

Classification EN50342-1			
W2	C2	V3	E2

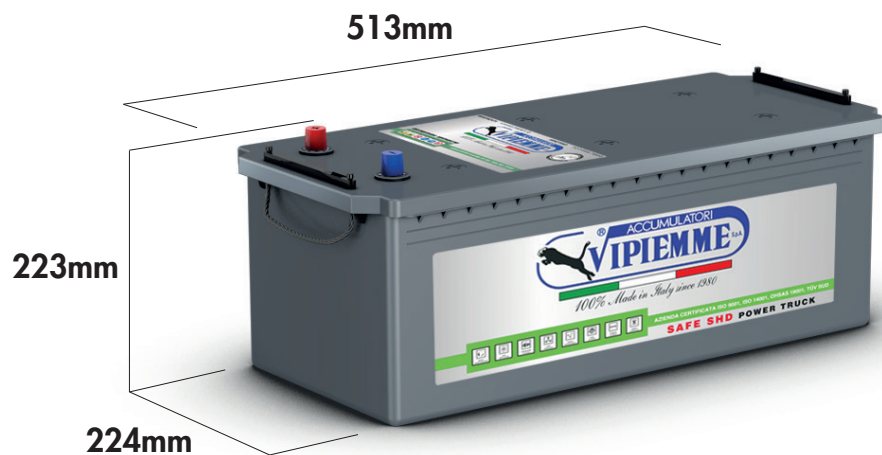


TECHNICAL CHARACTERISTICS




BOX AND LID
PP



FLAMES ARRESTOR
Placed in the Lid




SULPHURIC ACID
Density
1.29 +/- 0,01 g/ml
Approximate volume 11,4 l



TEMPERATURE
According to EN50342-1



BATTERY WEIGHT
44,1 ±5% Kg



PLATES
Casted grids in Pb/Sb alloy with enveloped positive ones in PE.