


MADE IN ITALY



DRY BATTERY									
Code	Voltage	Capacity	Cold Cranking	Res. Cap.	Terminal	Box	Bottom holds	Layout	Per Pallet
	V	Ah 20h	A (EN)	Minutes					
B137S	12	140	1020	270 (25A)	1 standard	MAC140	B0	+ left	7x3=21

TOP ENERGY TIR


Classification EN50342-1			
W2	C2	V3	E1

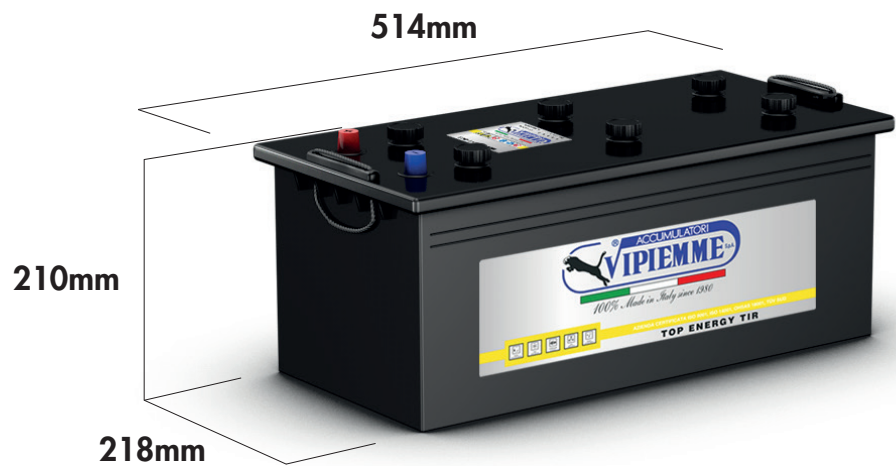


TECHNICAL CHARACTERISTICS




BOX AND LID
PP



TEMPERATURE
According to EN50342-1



SULPHURIC ACID
Density
1.29 +/- 0,01 g/ml
Approximate volume 10,9 l



PLATES
Casted grids in Pb/Sb alloy with enveloped positive ones in PE.



BATTERY WEIGHT
26,3 ±5% Kg