


MADE IN ITALY



FLOODED - MAINTENANCE FREE									
Code	Voltage	Capacity	Cold Cranking	Res. Cap.	Terminal	Box	Bottom holds	Layout	Per Pallet
	V	Ah 20h	A (EN)	Minutes	Conical				
B492C 31	12	105	800	187 (25A)	1 standard	GR31	B0	+ left	12x3

TOP ENERGY TIR

Classification EN50342-1	W3	C2	V3	E1
--------------------------	----	----	----	----

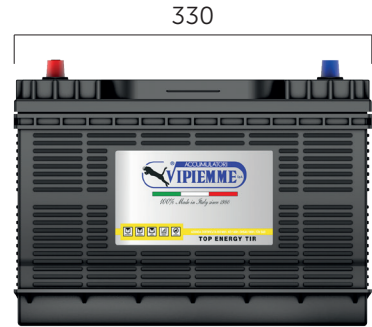

BOX AND LID COLOUR
Black


TECHNICAL CHARACTERISTICS




BOX AND LID
PP



TEMPERATURE
According to EN50342-1



SULPHURIC ACID
Density
1.29 +/- 0,01 g/ml
Approximate volume 6,15 l



PLATES
Expanded grids in Pb/Ca alloy
with enveloped positive ones in PE.



BATTERY WEIGHT
26,0 ±5% Kg