


MADE IN ITALY



DRY BATTERY									
Code	Voltage	Capacity	Cold Cranking	Res. Cap.	Terminal	Box	Bottom holds	Layout	Per Pallet
	V	Ah 20h	A (EN)	Minutes					
B248S	12	125	1000	230 (25A)	1 standard	EL110 NATO	B0	+ left/right	8x4=32

TOP ENERGY TIR


Classification EN50342-1			
W3	C2	V3	E1

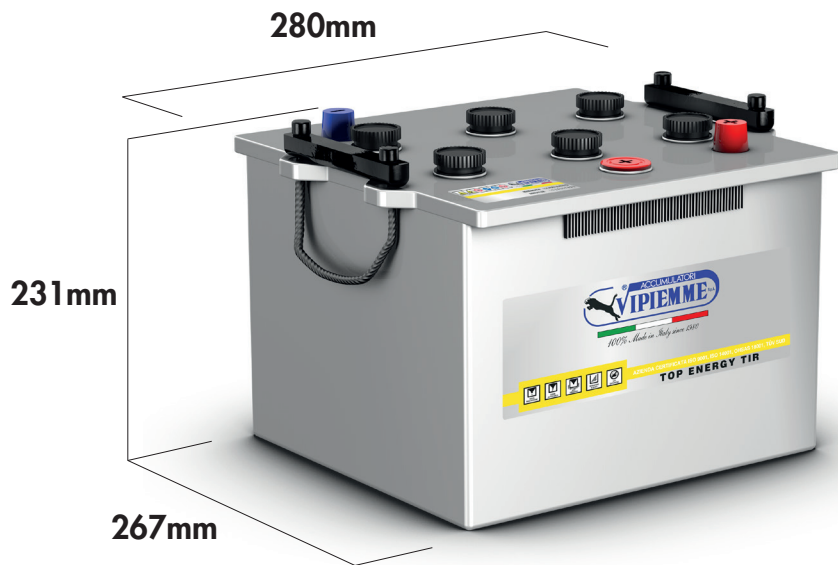


TECHNICAL CHARACTERISTICS




BOX AND LID
PP



TEMPERATURE
According to EN50342-1



SULPHURIC ACID
Density
1.29 +/- 0,01 g/ml
Approximate volume 7,2 l



PLATES
Casted positive grids in Pb/Sb alloy, enveloped in PE.
Negative ones in Pb/Ca alloy



BATTERY WEIGHT
24,0 ±5% Kg